

P R I M A R E

THE SOUND AND VISION OF SCANDINAVIA

NEW PRODUCTS
SPRING 2017





> The 115 Prisma integrated amplifier is a compact, full-featured system control and power center, providing 75 watts per channel, digital to analog conversion with PCM 768kHz and DSD 256 capabilities, as well as complete digital media access and system management by way of the Prisma connectivity and control technology. The 115 Prisma continues a Primare tradition of delivering astonishing performance from compact and elegant devices for easy installation into virtually any living environment. With the three-quarter-sized cabinet of the 115 Prisma, even greater possibilities open up for providing the highest quality music performance and access to any and every room in the house.



115 SPECIFICATIONS

AMPLIFIER

Output Power: 2x75W 8 Ω ; 2x 150W 4 Ω
Analog Inputs: 1 pair RCA
Analog Output: 1 pair RCA, switchable LINE or PRE
Frequency Response: 10Hz – 20kHz, -0.5dB
THD + N: < 0.05%, 20Hz – 20kHz, 10W at 8 Ω
Signal to Noise: -100 dB

DAC


Inputs: 4x TOSLINK (96 kHz); 2x RCA (44.1-768kHz / 16-32 bit);
1x USB-B (PCM 192 kHz / DSD 256)
Output: 1x RCA (192kHz native, optional 48kHz or 96kHz)

PRISMA

Audio formats: WAV, LPCM, AIFF, FLAC, ALAC, MP3, MP4 (AAC), WMA,
OGG, DSD
Sample rates: 24 – 192kHz
WLAN: IEEE 802.11 a/b/g/n/ac compliant; 2.4/5GHz
Inputs: USB-A (192kHz); 2xLAN (192kHz); WLAN (192kHz); Bluetooth®

GENERAL

Control: RS232; IR in/out; Trigger out
Power Consumption: Standby 0.2W; Operate 31W
Dimensions (wxdxh): 350x340x75 mm
Weight: 6.35 kg
Color Options: Black and Titanium

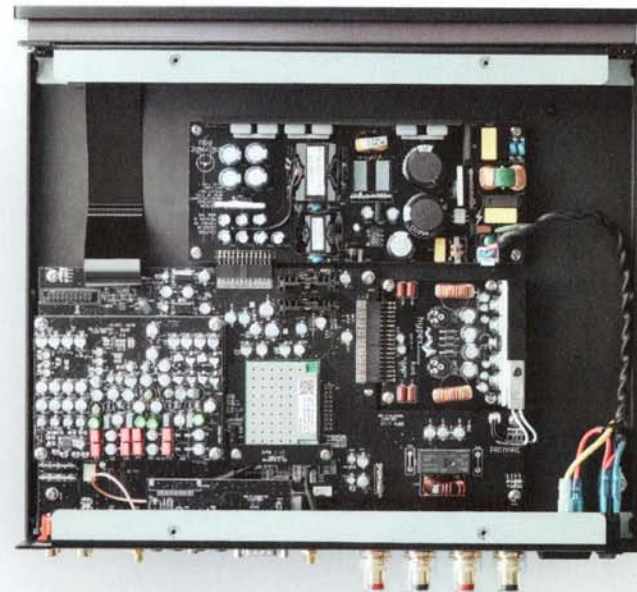

Specifications are preliminary and subject to change.

